


MW306R ROUTER KURULUM KILAVUZU

Görsel üzerinde router kurulumuna başlamadan önce modem veya farklı dağıtıcı üzerinden gelen internet kablosunu görsel üzerinde bulunan kırmızı kare kutucuk içerisinde alınmış WAN portuna takmanız gerekmektedir. Bilgisayara ise bir kablolu bir bağlantı sağlamak adına LAN portların herhangi bir portuna takmanız yeterli olacaktır.




Sonrasında cihazın arayüzüne giriş sağlamak adına kablolu yapıda olan bilgisayarın herhangi bir tarayıcısı üzerinden mwlogin.net üzerinden giriş sağlamanız yeterli olacaktır.

1. Time zone kısmından saat aralığını (UTC +03:00) Kuwait,riyadh olarak seçiniz. Sonrasında NEXT butonuna tıklayınız.

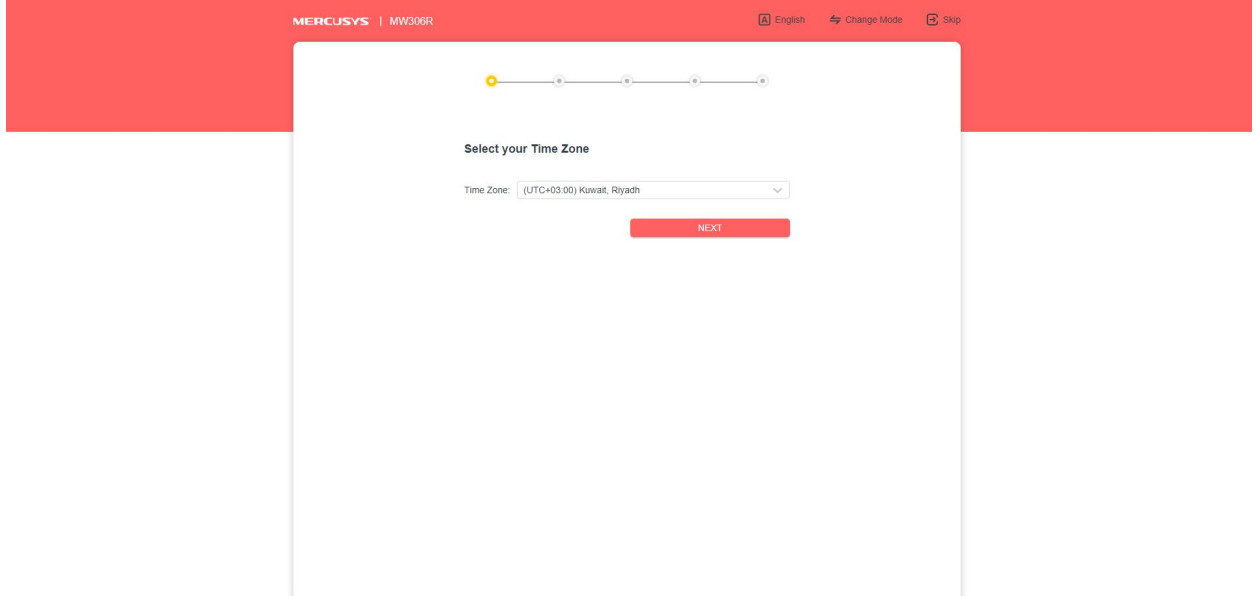

The screenshot shows the MERCUSYS MW306R setup wizard. At the top, there is a red header with the text 'MERCUSYS | MW306R' and navigation options: 'English', 'Change Mode', and 'Skip'. Below the header is a progress bar with five steps, the first of which is highlighted in yellow. The main content area is titled 'Select your Time Zone'. It features a dropdown menu labeled 'Time Zone:' with the selected option '(UTC+03:00) Kuwait, Riyadh'. Below the dropdown is a red 'NEXT' button.

2. Karşınıza gelecek olan bağlantı türleri (select connection type) gelecektir. Burada direk olarak dynamic İP seçmeniz gerekmektedir.

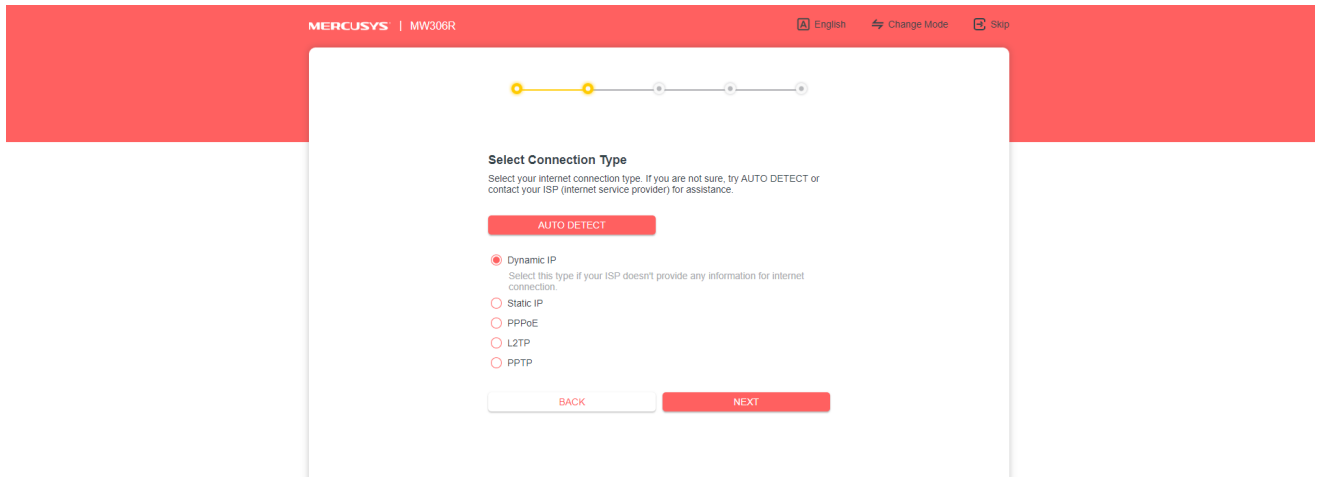

The screenshot shows the MERCUSYS MW306R setup wizard. At the top, there is a red header with the text 'MERCUSYS | MW306R' and navigation options: 'English', 'Change Mode', and 'Skip'. Below the header is a progress bar with five steps, the second of which is highlighted in yellow. The main content area is titled 'Select Connection Type'. It includes a sub-header 'Select your internet connection type. If you are not sure, try AUTO DETECT or contact your ISP (internet service provider) for assistance.' Below this, there are five radio button options: 'AUTO DETECT', 'Dynamic IP', 'Static IP', 'PPPoE', 'L2TP', and 'PPTP'. The 'Dynamic IP' option is selected. At the bottom, there are two buttons: 'BACK' and 'NEXT'.

3. Burada herhangi bir müdahale de bulunmadan next demeniz yeterli olacaktır.

The screenshot shows the 'Dynamic IP' configuration page. At the top, there is a progress bar with four steps, the second of which is highlighted. The page title is 'Dynamic IP' and the subtitle is 'Set the MAC address of your router. Use the default address unless your ISP allows internet access from only a specific MAC address.' Below this, there is a 'Router MAC Address' section with a dropdown menu set to 'Use Custom MAC Address' and a text input field containing '08 - 57 - 00 - 00 - 20 - 12'. A red arrow points to 'Special ISP Settings (IPTV/VLAN)'. At the bottom, there are 'BACK' and 'NEXT' buttons.

4. Sonrasında ki adımda cihazın kablosuz SSİD ve şifrelerini girişlerini sağlaması gerekmektedir.

The screenshot shows the 'Personalize Wireless Settings' page. At the top, there is a progress bar with four steps, the third of which is highlighted. The page title is 'Personalize Wireless Settings' and the subtitle is 'Personalize your wireless network name and password.' Below this, there is a '2.4GHz:' section with a checked checkbox for 'Enable'. The 'Network Name (SSID):' field contains 'MERCUSYS_5C9C'. There is a 'Hide SSID' checkbox which is unchecked. The 'Password:' field contains '83433696'. At the bottom, there are 'BACK' and 'NEXT' buttons.

5. Adımda kablolu yapıyı doğru bir şekilde takılı ise modem ve ya farklı bir dağıtıcı üzerinden internet erişimi sağlıklı bir şekilde cihaza ulaşıyor ise cihaza internet bağlantısı gelecektir.

Next dedikten sonra 2. Görsel üzerindeki adımlar karşınıza çıkacaktır. Sonrasında finish diyerek kurulumu tamamlayabilirsiniz.

